



# CUB601K

IEEE 802.11b/g/n Wi-Fi-USB industrial module



CUB601K

*The cost effective industrial wireless LAN solution*

## Introduction of Products

BOINTEC CUB601-K is a LAN module supporting IEEE 802.11 b/g/n standards with pin connector supporting USB 2.0 interface. This is a compact LAN module designed to be embedded in a system of wireless connectivity. This module is designed to operate in 2.4GHz ISM frequency band, it provides highly integrated MAC/BBP and FR integrated TR070 with 50Mbps PHY rate supporting. It fully complies with IEEE 802.11n draft 3.0 and IEEE 802.11b/g feature.


Bointec CUB601-K implements half-duplex OFDM, CCK and DSSS base-band processing supporting IEEE 802.11b/g/n data rates. The MAC supports the IEEE 802.11 wireless MAC protocol as well as 802.11i security, receive and transmit filtering, error recovery, and quality of service (QoS). CUB601-K also supports software based Wi-Fi Protected Setup (WPS). Simply enable the WPS feature from the WIFI software and your device will automatically setup the WIFI security with a compatible WPS wireless router. Setting up a secure wireless network has never been so easy.

## Product Highlight

- ? 1T1R Mode with 150Mbps PHY Rate for Both Transmit and Receiving.
- ? Legacy and High Throughput Modes
- ? 20MHz/40MHz Bandwidth
- ? Reverse Direction Grant Data Flow and Frame Aggregation
- ? WEP 64/128, WPA, WPA2, TKIP, AES
- ? QoS-WMM, WMM-PS
- ? WPS, PIN, PBC
- ? Multiple BSSID Support
- ? USB 2.0 bus, miniPCI express mechanical interface
- ? International Regulation - 802.11d + h
- ? Diversity, 2 IPEX antenna
- ? Low Power with Advanced Power Management
- ? Operating Systems - Windows XP 32/64, 2000, Vista 32/64 , Linux, Macintosh

## ■ Specification

Physical	
Dimensions	40.0mm x 18.0mm x 5.6mm
Package	Module Size, with mounting hole
Temperature	operation, -20~+70? Store, -30~+85? .
Chipset Solution	
Chipset	Ralink RT3070 Single Chip
Host Interface	USB 1.1/2.0
Standards	Complies with IEEE 802.11b/g and compatible to IEEE 802.11n draft 2.0(150 Mbps Wireless LAN)
Radio	
Frequency Bands	2.4000~2.4835GHz
RF Transmit Power	802.11b: 16dBm, ± 1.5 802.11g: 14dBm, ± 1.5 802.11gn, HT20: 13dBm, ± 1.5 @ 72Mbps 802.11g HT40: 11dBm, ± 1.5 @ 150Mbps
RF Receive Sensitivity	802.11b: -76dBm, ± 1.5 @ 11Mbps 802.11g: -67dBm, ± 1.5 @ 54Mbps 802.11gn, HT20: -64dBm, ± 1.5 @ 72Mbps 802.11g HT40: -61dBm, ± 1.5 @ 150Mbps
Channels	1-11 channels in base mode (US, Canada) 1-13 channels (ETSI, Japan) 1-13,14 channels (Japan)
Baseband	
Spread Spectrum	OFDM, DSSS
Modulations	DSSS with DBPSK, DQPSK, CCK (11b) OFDM with BPSK, QPSK, 16QAM, 64QAM (11g) OFDM with BPSK, QPSK, 16QAM, 64QAM (11n)
Media Access Protocol	CSMA/CA with ACK
Data Rate	
11b	1/2/5.5/11 Mbps
11g	6/9/12/18/24/36/48/54 Mbps
11n (20MHz)	MCS0-7 (up to 72Mbps)
11n (40MHz)	MCS0-7 (up to 150Mbps)
Software	
QoS	WMM, WMM-PS
Security	WEP (64/128 bit), WPA, WPA2, WPS, 802.1x, TKIP, AES Cisco CCX Support
Drivers	Windows XP 32/64, 2000, Vista 32/64, Linux, Macintosh

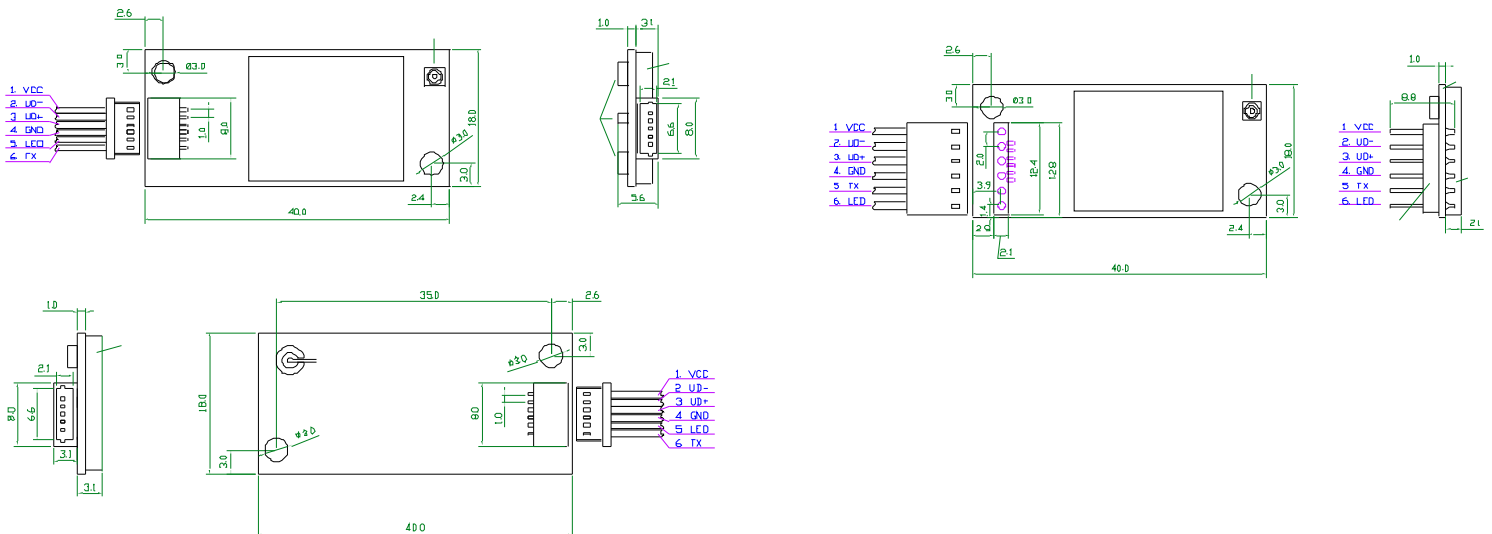

BOINTEC TAIWAN CO LTD  
1F, #3, A20, L790, SEC. 5, CHUNGHSIAO E. RD., TAIPEI 110, TAIWAN  
TEL: +886-2-2759-0081 FAX: +886-2-2759-1659  
WWW.BOINTEC.COM

(C)BOINTEC. All rights reserved. Bointec & the Bointec logo are the trademarks of Bointec, which may be registered in some jurisdictions. All other brands and product names are registered trademarks of their respective holders. Information supplied by Bointec is believed to be accurate and reliable. Bointec assumes no responsibility for any errors in this brochure. Bointec reserves the right, without notice, to make changed in product design or specifications. [www.bointec.com](http://www.bointec.com)  
BOINTEC\_CUB601K\_bgn\_USB\_module\_v0.2