




DSW802R

WiFi 802.11 b/g/n and BT4.0 SMT Module

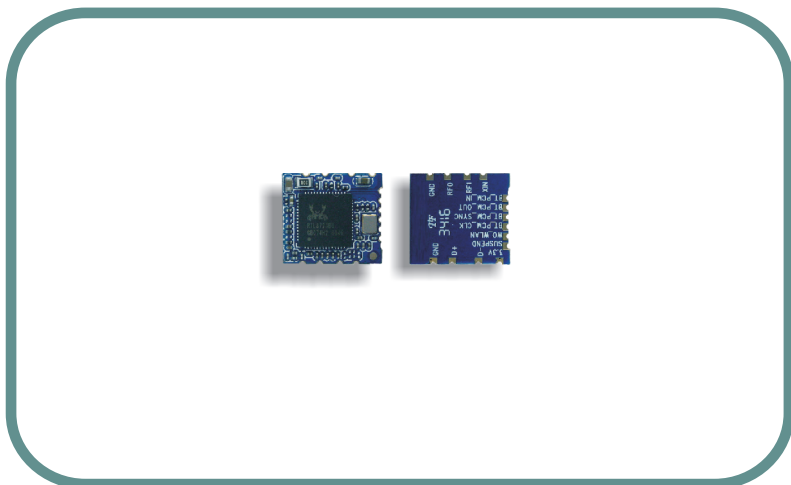

DSW802R

802.11 b/g/n with Bluetooth 4.0 Combo 1T1R, SMT Type, USB Module

Introduction of Products

Bointec DSW802R is a solder down module of Wi-Fi 802.11bgn with Bluetooth 2.1/3.0/4.0 multi-function network interface controller by USB 2.0.

It combines a wireless LAN MAC, a 1T1R capable baseband, and RF. Using by Realtek RTL8723BU, it provides a complete solution for a high-performance integrated wireless and Bluetooth device.

The integration provides better coordination between 802.11 and Bluetooth, and with sophisticated dynamic power control and packet traffic arbitration, it is able to provide the best coexistence performance overview.

Product Highlight


- Main Chipset Realtek RTL8723BU
- IEEE 802.11 b/g/n compliant with 2.4GHz frequency band
- Bluetooth 2.1+EDR/3.0 and BT4.0 Dual Mode
- Supporting HT20/HT40 bandwidth
- 1T1R; antenna outlet two; as diversity
- 802.11b: 1, 2, 5.5, 11Mbps;
802.11g: 6, 9, 12, 24, 36, 48, 54Mbps ;
802.11n: Support PHY rate up to 150Mbps.
- USB 2.0 interface
- Complies with USB Specification Revision 2.0
- RoHS & Halogen free compliant / Lead free




Specification

General	
Main Processor	Realtek® RTL8273BU
Frequency band	2.4GHz (2.412 GHz to 2.4835 GHz)
Antenna	Internal : N/A External : via pin assignment
Interfaces	USB 2.0
Dimension(L*W*H)	12*13.4*1.6mm (LxWxH) ;Tolerance: +0.2mm
Operating Voltage	3.3 V ± 0.3V
Power Consumption	96mA at 3.3V(standby) 255mA at 3.3V (TX mode)
Clock Source	40MHz
Temperature	0°C to +50°C (Operation) -40°C to +85°C (Storage)
WiFi	
Standard	IEEE 802.11b IEEE 802.11g IEEE 802.11n
Bandwidth	HT20 and HT40
RF Input / Output	1T1R
Modulation	802.11b: CCK, DQPSK, DBPSK 802.11g: 64 QAM, 16 QAM, QPSK, BPSK 802.11n: 64 QAM, 16 QAM, QPSK, BPSK
Work mode	Infrastructure, Ad-Hoc
Roaming	Support
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS 0 to 7 (HT20) 802.11n: MCS 0 to 7 (HT40)
Spread Spectrum	IEEE 802.11b: DSSS (Direct Sequence Spread Spectrum) IEEE 802.11g/n:OFDM (Orthogonal Frequency Division Multiplexing)
RF Output	16dBm@11b, 14dBm@11g , 13dBm@11n
Sensitivity	1M: -92dBm@8%PER 6M: -89dBm@10%PER 11M: -86dBm@8%PER 54M: -73dBm@10%PER 135M: -67dBm@10%PER
Distance	100M(802.11gn typical) 300M(open space)
Internet Protocols	IPv4, TCP/IP
Security Protocols	WPA, WPA2-PSK,WEP
Bluetooth	
Standard	Bluetooth 2.1+EDR Bluetooth 3.0 Bluetooth 3.0+HS Bluetooth v4.0
Modulation	8DPSK, π/4 DQPSK, GFSK
Data Rate	1 Mbps for Basic Rate 2,3 Mbps for Enhanced Data Rate
Spread Spectrum	FHSS(Frequency-Hopping Spread Spectrum)
RF Output	+10dBm (MAX.)
RX: Sensitivity	-89dBm@1Mbps -85dBm@2Mbps -83dBm@3Mbps
Distance	10M (Maximum)


Product quick glance



ME Drawing/placement



Block Diagram

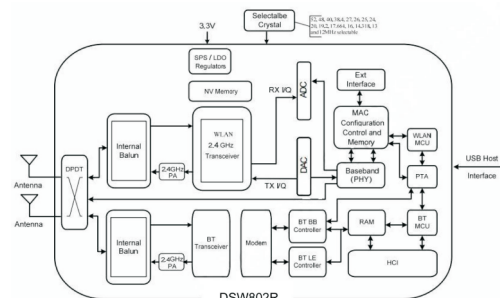

Ordering Information

PART NUMBER	DESCRIPTION
TFGA-DSW802R0-11	Finished non packing,Bointec,DSW802R
T.DSW802R	Single pack,OEM,DSW802R
T.DSW802R-DK	DSW802R-DK,Single packed, nature packed, development kit packed



We are Your Partner more than Business



TAIJET BOINTEC CO LTD
4F, #114,ZHOULI ST., NEIHU-TAIPEI 11493, TAIWAN
TEL: +886-2-2759-0081 EMAIL:contact@bointec.com
WWW.BOINTEC.COM

(C)BOINTEC. All rights reserved. Bointec & the Bointec logo are the trademarks of Taijet Bointec, which may be registered in some jurisdictions. All other brands and product names are registered trademarks of their respective holders. Information supplied by Bointec is believed to be accurate and reliable. Bointec assumes no responsibility for any errors in this brochure. Bointec reserves the right, without notice, to make changed in product design or specifications.

Bointec Authorized Distributer